32" Smart Touch Panel



The picture is for reference only

1. Product Feature

- 32 inces FHD Display
- Mobility wireless, built-in battery
- Easy operate Capacitive touch technology
- Full Movement rotate with wheels, swivel, tilt

2. Display

Size	32"
Response Time	8ms
Aspect Ratio	16:9
Resolution	1920 (H) ×1080 (V)
Display Color	1.07B (10bit)
NTSC(Typ)	72%
Contrast Ratio(Typ)	1200:1
Viewing Angle	R/L 89/89, U/D 89/89
Back Light Unit	ELED
Brightness with glass(typ)	300cd/m2
Life Time	≥30000 hrs

3. Audio

Sound Channel	2.0
Speaker Power	2×5W

4. Touch System

Sensing Type	Capacitive Touch
Touch Interface	HID-USB
Touch Point	10 points touch

5. Integrated System

chip solution	RK3576S
os version	Android 14.0
CPU	Quad-core Cortex-A53 + Quad-core Cortex-A72
GPU	G52 MC3
RAM	8GB
ROM	128GB
OSD	Multi-language OSD Operation

6. Bluetooth

version	5.3
operating frequency	2.4GHz&5GHz
operating distance	0~10m
clarification	built-in bluetooth

7. Wi-Fi

version	IEEE802.11a/b/g/n/ac/ax
operating frequency	2.4GHz/5GHz
operating distance	0~10m
note	built-in Wi-Fi

8. Onboard Interface

USB	1 (USB 2.0 Host)
USB	1 (USB 3.0 Host)
Type_C	1 (Supports ADB Only)
HDMI IN	1
DC IN	DC Power Input

9. Power

Power Requirements	21700 type lithium-ion battery
Battery Capacity	14.6V/15000mAh
Battery Duration	≈6-8H
Power Requirements	18V/5A

10. Structural Function

Tilt (forward-backward)	-20° ~ 20° ±3°
Deflection (left/right)	-15° ~ 15° ±3°
Rotate (clockwise)	Supports 90°
Lift (up-down)	140mm

11. Other Configurations

Product colour	White/Black
VESA	100x100mm
button	Power/Volume Up/Volume Down
gravity sensor	Supports 90°
microphone	Comes standard with dual microphones, supports noise reduction and echo cancellation
camera	External USB camera (portrait mode, 8 megapixels)
certification	CCC/CE/FCC

12. Physical Specification

$\begin{array}{c} \text{Dimension(package)} \\ \text{L} \times \text{W} \times \text{H} \end{array}$	880×570×220 mm
Net Weight	21.5+/-1Kg
Gross Weight	22.5+/-1Kg


13. Accessories


Adapter	×1
AC Power Cord	×1 (L=1.5m)
lid	×1
screwdriver	×1
manual	×1
USB cable	*1
Equipment Feet	*5
remote control	*1(Bluetooth voice version)

14. Environmental Condition

Operation Temperature	0°C~40°C
Operation Humidity	20~80%RH
Storage Temperature	-20°C60°C
Storage Humidity	10~95%RH
Altitude	< 5000m

15. Dimension

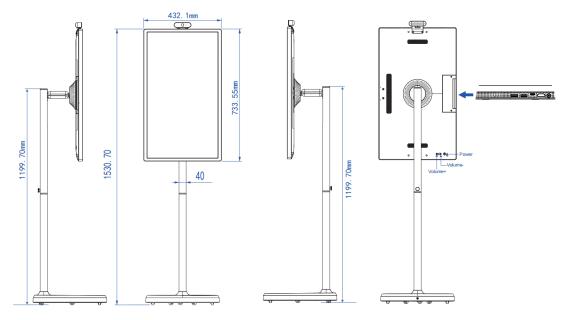

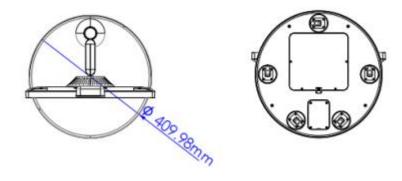

16. Statement

Affected by product configuration and manufacturing process, the actual body size/body weight may be different, please refer to the actual product.

The product images in this specification are for illustrative purposes only. The actual product effect (including but not limited to appearance, color, size) may be slightly different, please refer to the actual product.

In order to provide accurate specifications as far as possible, the text description and picture effects of this specification may be adjusted and revised in real time, so as to match the actual product performance, specifications and other information.